

VACUUMING SOLUTION FOR
SURFACE AND FLOOR PREPARATION



WHY CHOOSING DELFIN VACUUM CLEANER?



- ✓ Safe dust **DISPOSAL**
- ✓ Extended working **AUTONOMY**
- ✓ **TIME SAVING**
- ✓ Compliance with **SAFETY STANDARDS**
- ✓ **EFFICIENCY** and **DURATION** even with intensive use
- ✓ **CERTIFIED QUALITY**
- ✓ **STRENGTH, VERSATILITY** and **USER-FRIENDLINESS**
- ✓ Certified safety for the **OPERATOR**
- ✓ **CUSTOMIZED** solutions



APPLICATIONS



Application with
FLOOR SANDER



Application with
FLOOR SCARIFIER



Application with
SHOT BLASTER



Application with
MANUAL TOOL



FLOOR CLEANING
after work



Application with
**CORE DRILLING
MACHINE**





THE RANGE



		MTL 301 DUST	MTL 202 DS	DM3 EL	DG70 EXP PN	802 WD - 802WXP	LONGOPAC SEPARATORS
Voltage	V-Hz	230-50 1~	230-50 1~	230-50 1~	400-50 3~	230-50 1~	
Power	kW	1,15	2,3	3,45	5,5	2,3	
Max air flow	m³/h	180	360	540	530	360	
Filter/Surface	cat/m²	M PTFE/0,6	M PTFE/3	L / 3	ANT M/8	Bag/ 0,8 - /	
Discharge system	lt	Detachable container 13lt	Detachable container 20lt	Detachable container 60lt	Detachable container 100lt	Detachable container 80lt	Longopac 20mt
Cleaning system		DUSTOP	DUSTOP	Manual	Pneumatic	/	
Dimensions and weight	cm-kg	46x48x85h-25	59x48x110h-35	67x66x134h-70	66x118x187h-180	53x59x106h-50	



NEW XTRACTOR with Longopac bag system

		MTL 202 DS LP	DM3 EL LP	XTRACTOR 3BP	XTRACTOR 2BL	XTRACTOR 75 AF	XTRACTOR 55
Voltage	V-Hz	230-50 1~	230-50 1~	230-50 1~	230-50 1~	400-50 3~	400-50/60 1~
Power	kW	2,3	3,45	3,45	2,2	7,5	5,5
Max air flow	m³/h	360	540	540	430	700	1600
Filter/Surface	cat/m²	M PTFE/3	ANT M/3	M PTFE/5,7	M PTFE/5,7	M PTFE/8	M PTFE/20
Telescopic vacuum		Yes	Yes	Yes	Yes	No	No
Discharge system	lt	Longopac 20 mt	Longopac 20 mt	Longopac 20mt	Longopac 20mt	Longopac 20mt	Longopac 20mt/ Container 100lt
Cleaning system		DUSTOP	Manual	Pneumatic	Pneumatic	Pneumatic	Pneumatic
Dimensions and weight	cm-kg	50x48x125h-50	80x66x155h-70	65x91x164h-140	65x91x172h-145	78x127x178h-215	86x190x161h-450

SPECIFIC SOLUTIONS FOR SURFACE TREATMENT



TELESCOPIC SYSTEM WITH GAS SPRINGS


It simplifies loading, unloading and handling operations on vehicles with limited space, reducing the total height of the vacuum cleaner up to 25 cm.



M/H CATEGORY FILTERS WITH PTFE COATING

Increased vacuuming efficiency and working autonomy.
Greater safety for the operator.
Guaranteed cleanliness of the air returned into the environment.

Compliance with safety standards.

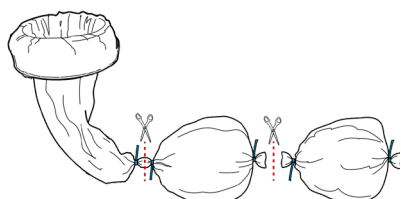

LONGOPAC BAGGING SYSTEM

Continuous 20 meters long bagging which allows the operator to adjust weight and length according to needs, totally preventing contact between fine dust and the operator.



TÜV AND ASBESTOS CERTIFICATES FILTER CLASS H14

Quality guaranteed certified by an external institution.



Also suitable for **silica dust** suctioning.



DELFIN: A STORY OF SUCCESS

Delfin was founded almost thirty years ago by Antonino Siclari and his passion for the industrial vacuuming sector.

From that moment on, he has never stopped working to offer his customers efficient, innovative and high quality solutions, solving aspiration problems for industries all over the world.

Every day we create innovative solutions to improve production efficiency, ensure safety and to increase productivity. Today you can find us all over the world, with direct branches, dealers and exclusive partners who represent our brand, supply our products and guarantee support to our customers.



DELFIN SRL



STRADA DELLA MERLA, 49/A
10036 SETTIMO T.SE (TO) ITALY



T +39 011 800 55 00
F +39 011 800 55 06



DELFIN@DELFINVACUUMS.IT



DELFINVACUUMS.IT

Follow Us!

